

# Non-line-of-sight :: 900 MHz

The AW-D2-900 replaces costly cables and trenching with a non-line-of-sight, wireless network camera housing that enables remote network cameras. AvaLAN's products offer the ideal combination of price, penetrating range, data rate, security, interference avoidance, Quality of Service, and ease-of-use.



## AW-D2-900 Kit

Integrated 900 MHz wireless dome housing for PTZ network cameras. Kit includes:

- (1) Dotworkz D2 outdoor dome housing with heater/blower
- (1) AW900x outdoor radio
- (2) 120 VAC to 24 VAC/40 Va transformers
- (2) AW2 2.5 dBi omni-directional antennae
- (1) 120 VAC to 12 VDC power adapter
- (1) Power over Ethernet injector

## Features

- High RF output power and exceptional receive sensitivity provide ultra-long-range wireless IP digital video delivery up to 40 miles line-of-sight or 10 walls/grove of trees for non-line-of-sight applications
- Does not interfere with Wi-Fi networks
- 128 bit encrypted with dynamic private keys
- Highest Quality of Service (QoS) available – synchronous point-to-point protocol enables IP video applications that require low data latency and jitter
- Simple plug and play – pre-configured as matched pairs with no user programming required
- 12 non-overlapping channels with frequency agility to avoid interference
- Operates in the 902-928 MHz band and does not require a license to operate or install in the USA or Canada


For a list of network cameras supported, please visit:  
<http://www.avalanwireless.com/NetworkCameras.htm>



## System diagram

### Non-line-of-sight range

- With AW2:
- 600 ft. / 2 trees
- With AW10 or AW11:
- 1,200 ft. / 3 trees
- With AW15:
- 1,500 ft. / 3 trees

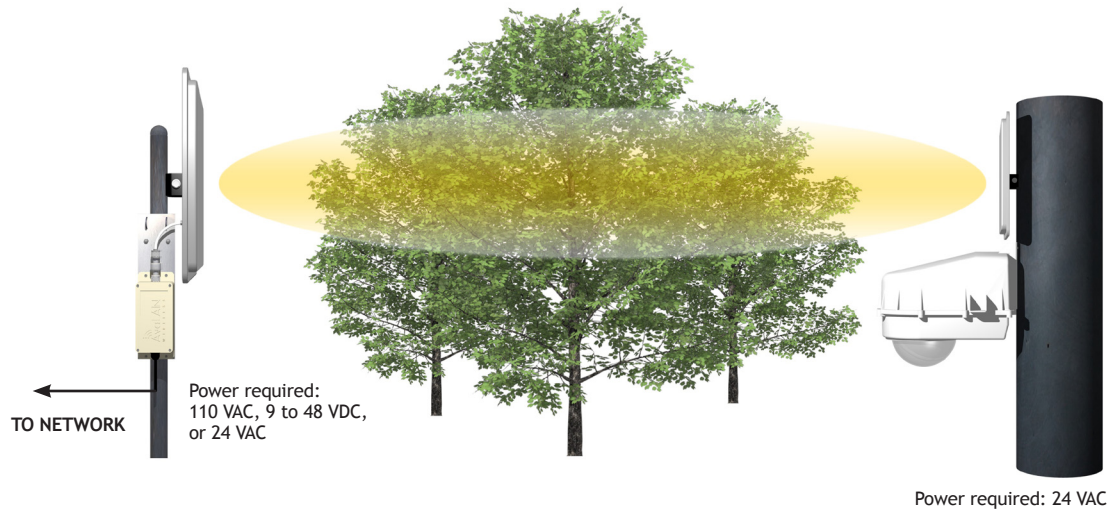

## Technical specifications

CHARACTERISTIC	SPECIFICATION / DESCRIPTION
RF transmission rate	1.536 Mb/s
Ethernet throughput	935 Kb/s
Output power	+21 dBm (4 Watts EIRP used with 15 dBi antennae)
Receive sensitivity	-97 dBm at 10e-4 BER (-112 dBm with 15 dBi antennae)
Latency	< 2 ms – assuming a dedicated wireless link to client device
Jitter	±0.5 ms – depending on packet size, interference, and SNR
Voltage Range	<b>AW900x:</b> 9-48 VDC <b>AW-D2-900:</b> 24 VAC
Power Consumption	<b>AW900x:</b> TX 1.3 W and RX 0.6 W over 9-48 VDC input voltage <b>AW-D2-900:</b> 55 W (including 20 W heater) maximum
Radio channels	12 non-overlapping
Automatic frequency select	Yes – radio channel automatically selected and adaptively optimized
Manual frequency mode	Yes
Status LEDs	Power, Ethernet Link, RF RX, RF TX, 4/Channel, and 6/Link Quality
Error correction technique	Sub-block error detection and retransmission
Adjacent-band rejection	SAW receiver filter attenuates cellular and pager interference
Temperature range	<b>AW900x:</b> -40° C to 70° C <b>AW-D2-900:</b> -30° C to 50° C (depends on temperature range of camera) Heater turns on at 10° C and off at 27° C Blower turns on at 45° C and off at 27° C
Power over Ethernet	Use with 9 VDC to 48 VDC POE systems with lines 4/5 positive, 7/8 ground Includes injectors/power supplies

## Ordering information

PART NUMBER	DESCRIPTION
AW-D2-900	Integrated 900 MHz wireless dome housing kit for PTZ IP cameras

©2004 – 2008 AvaLAN Wireless Systems Incorporated. All rights reserved. AvaLAN Wireless and the AvaLAN Wireless logo are registered trademarks of AvaLAN Wireless Systems Incorporated. All other trademarks are property of their respective owners. AvaLAN Wireless makes no representations or warranties with respect to the accuracy, utility, or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, express or implied, by estoppel or otherwise, to any patents or other intellectual property rights is granted by this document. Particular uses or applications may invalidate some of the specifications and/or product descriptions contained herein. The customer is urged to perform its own engineering review before deciding on a particular application. AvaLAN Wireless products are not designed for use in medical, life saving, or life sustaining applications. 03.06.2008